


Dimensions

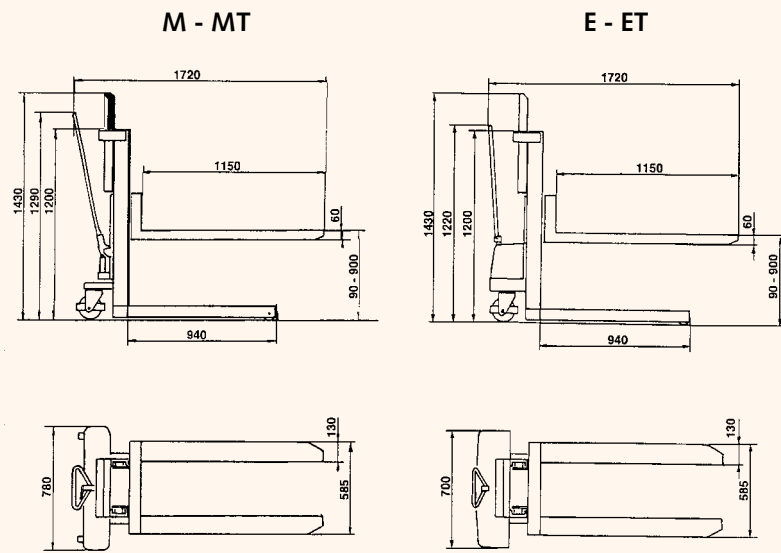

Kentruck

KENTRUCK AB
 SE - 668 32 ED • Sweden
 Tel: +46 (0)534 625 00
 Fax +46 (0)534 625 10
 E-mail office@kentruck.se
 www.kentruck.se

NEW GENERATION

Kentruck

ERGO 800

M-MT-E-ET

- Flexible
- Powerful
- Ergonomic
- Manoeuvrable

Technical specifications:	M	MT	E	ET
Lifting capacity	800 kg	800 kg	800 kg	800 kg
Lifting height	900 mm	900 mm	900 mm	900 mm
Lifting speed with load low gear	42 mm/stroke	42 mm/stroke	0,05 m/s	0,05 m/s
without load high gear	45 mm/stroke	45 mm/stroke	0,08 m/s	0,08 m/s
with load low gear	12 mm/stroke	12 mm/stroke		
without load low gear	14 mm/stroke	14 mm/stroke		
Tilt capacity	20° tilting angle	800 kg		800 kg
45° tilting angle		500 kg		500 kg
Weight	212 kg	212 kg	238 kg	238 kg
Wheels	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Noise level	-	-	65 dBa	65 dBa
Battery indicator	-	-	included	included
Battery	-	-	12V/75Ah	12V/75Ah
Charger	-	-	12V/10A	12V/10A

Kentruck retains the right to make changes in design and specifications without priore notice.

A selection from our wide range of products



Dealer



Kentruck AB

Introduces a new range of **ERGO** work positioners. The Ergo acts as a stacker and a work positioner. It is ergonomically designed, easy to move and operate. The design of the Ergo is specifically engineered to avoid back injuries in the workplace.

ERGO 800 M

Is a flexible hand hydraulic stacker. The sturdy construction enables lifting of loads up to 800 kg. The compact design in conjunction with the progressive steering makes it manoeuvrable and flexible. The ERGO 800 M has a two speed lift, one quick lift for lighter loads and one normal lifting speed for heavier loads.

The steering handle hydraulically lifts the forks. The lowering handle is placed centrally in the steering handle. The lowering speed is adjustable. The ERGO 800 M is fitted with a lockable parking brake.

ERGO 800 MT

Has all the benefits of the ERGO 800 M, but also fitted with a 45° fork tilting facility - either way. This facility is extremely useful when material is being picked or put into boxes or crates. There are two tilting speeds. The steering handle operates both the lifting and tilting facilities.

ERGO 800 E

Is used in the same way as ERGO 800 M, but is also fitted with electric lift. Lifting and lowering of the forks is controlled with electric push buttons fitted to a remote control unit which is attached to the truck by a flexible cable. The control unit can be attached to the truck by an inbuilt magnet.

ERGO 800 ET

Has all the benefits of the ERGO 800 E, but is also fitted with a 45° fork tilting facility - either way. This facility is extremely useful when material is being picked or put into boxes or crates. The lifting, lowering and tilting of the forks is controlled with electric push buttons fitted to a remote control unit which is attached to the truck by a flexible cable. The control unit can be attached to the truck by an inbuilt magnet.



- **ERGO 800M**
- Lifting capacity 800 KG
- Two lifting speeds
- Variable lowering speed
- Progressive steering
- Parking brake



- **ERGO 800 MT**
- Lifting capacity 800 KG
- Two lifting speeds
- Two tilting speeds
- Tilting angle 45°
- Variable lowering speed
- Progressive steering
- Parking brake



- **ERGO 800 E**
- Lifting capacity 800 KG
- Battery hydraulic lifting function
- Flexible control console attached with magnets on optional place
- Progressive steering
- Parking brake

- **ERGO 800 ET**
- Lifting capacity 800 KG
- Battery hydraulic lifting function
- Battery hydraulic tilting function 45°
- Flexible control console attached with magnets on optional place
- Progressive steering
- Parking brake



Made in Sweden

