

Kentruck



**Stacker
HL 1000
HLP 1000**



- * Silent
- * Resistant to wear
- * Excellent manoeuvrability
- * Variable lowering of goods
- * Stable
- * New air motor

HL 1000 (ALTERNATIVELY HLP 1000) - THE ECONOMIC ALTERNATIVE

HLP 1000

Hand pushed stacker with a new unique air motor operating the hydraulic pump. The new air motor offers silent operation and variable control of the lift height. Connection to normal compressed air equipment. The use of hand pumping is also possible where air connection is not available.

The switching between air and manual control is smooth by means of the fitted and easily accessible towbar.

Variable lowering of the forks by manual control.

Option

HL 1000 and HLP 1000 can be delivered with different types of wheels and with parking brake. Beyond the standard model, HL 1000 is also available in two different straddle versions: 1050 and 1250 mm.



The straddle versions are equipped with an adjusting device for the forks according to SMS standard. The straddle version of the HL 1000 is also prepared for montage of the new air motor.

HL1000


Stacker type HL 1000 is a hand pushed pump stacker, designed as the HLP 1000. The forks are raised by a towbar and lowered by manual control. HL 1000 is prepared for easy completion with the new air motor.

Both the HLP and the HL 1000 versions offer a maximum manoeuvrability due to completely turning steering wheels.

DIMENSION SKETCH - TECHNICAL DATA

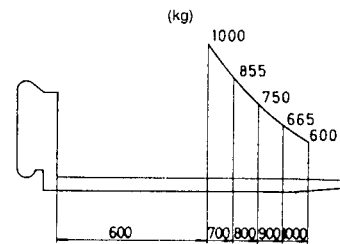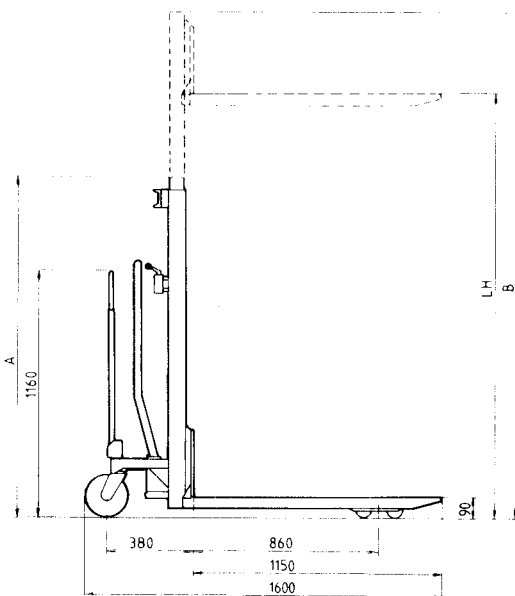

Load diagram

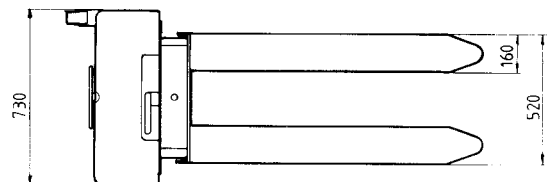

Capacity:	1000 kgs at 600 centres
Fork height:	90 mm in lowered position
Turning radius:	1600 mm
Lift height/pump stroke:	30 mm (HL1000)
Lifting velocity	2 m/min at 7 bar (HLP1000)
Aisle width:	2000 mm (with standard pallet - full size - and 90° stacking, including safety limit)
Wheels:	Steering wheels: dia. 200x50 mm - Fork wheels: dia. 82x75 mm
Steering wheels:	Standard: Nylon - Option: Polyurethane, rubber or steel
Fork wheels:	Standard: Nylon - Option: Polyurethane or steel

Lift height (mm)	Measure A (mm)	Measure B (mm)	Weight (kg)
1100	1500	1530	170
1500	1930	1930	190
2350	1650	2780	210

We reserve the right to improvements without prior notice.

Manufactured by:

Kentruck AB
S-668 32 ED
SWEDEN

Retailer: